


Professional Heat Shrink Tubes for every application.

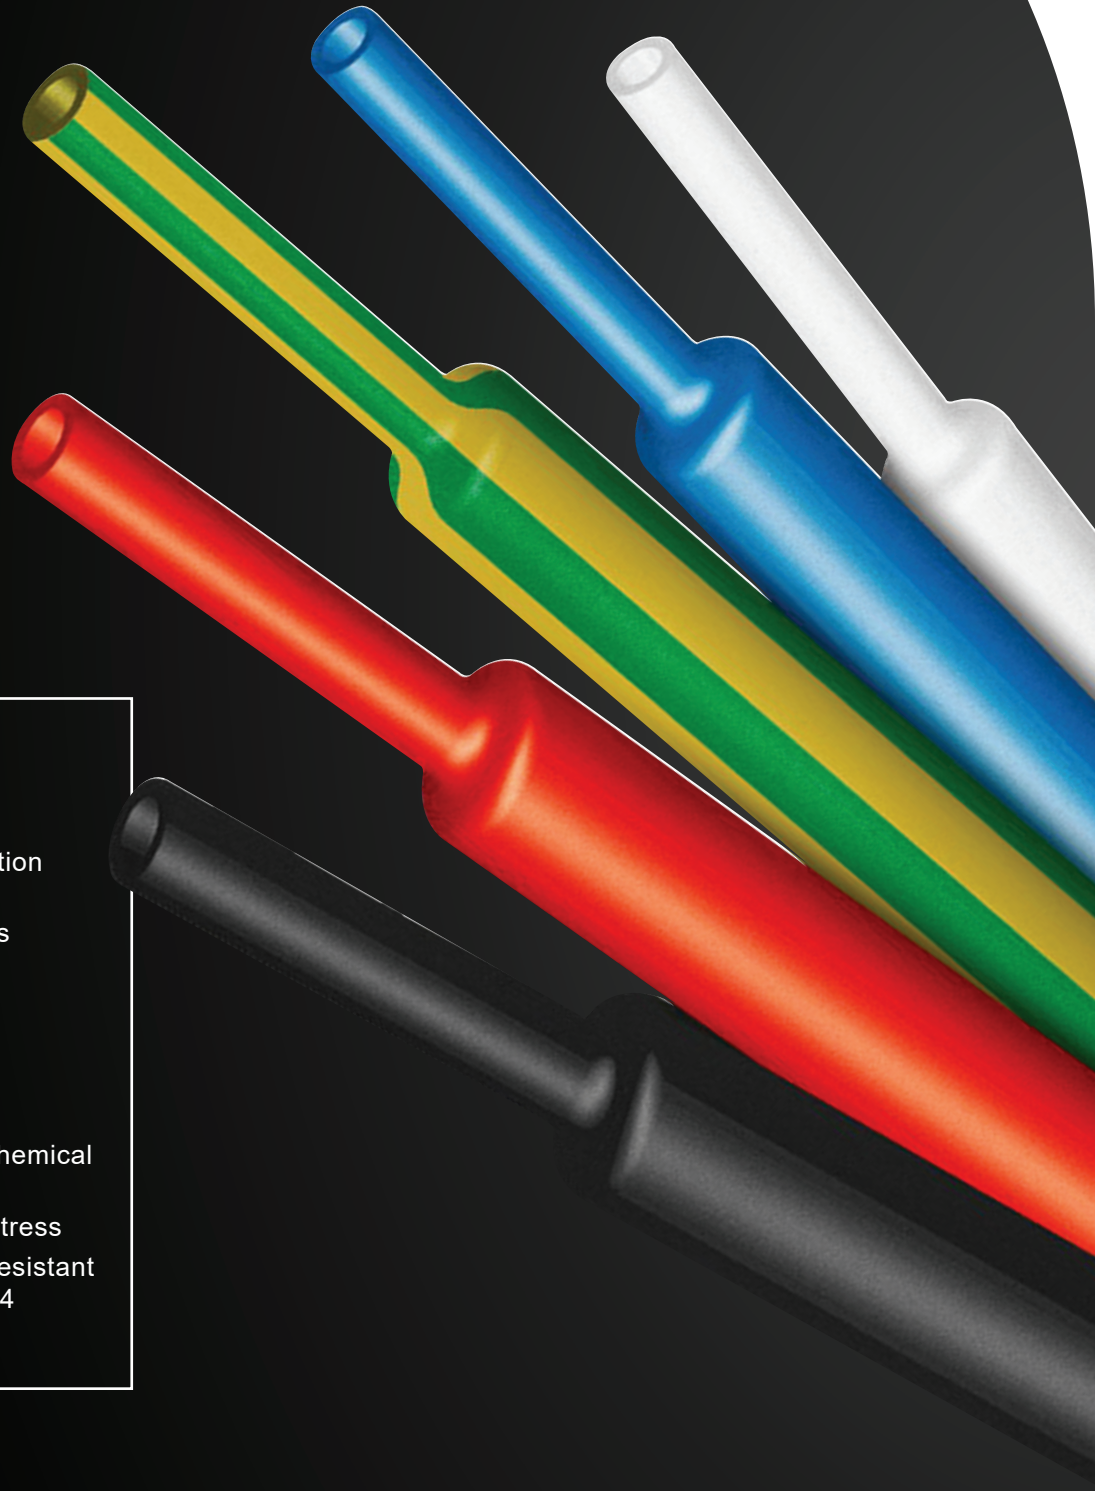

Applications

- Electrical and mechanical protection of cables
- Permanent electrical insulation
- Applications requiring self-extinguishing properties
- Cabling identification

Advantages:

- Isolation
- Waterproofness
- Protection from moisture, chemical corrosion and dirt
- Resistance to mechanical stress
- Self-extinguishing, for fire resistant sheaths according to UL 224
- High shrinking capacity

new



12251024



12253032



12273381

Heat shrink tubing (halogen-free)

Provides an effective halogen-free, flexible, flame retardant, abrasion resistant insulation protection for cables and busbars in electrical and electronics applications.

- Supplied in rolls within a dispensing box or 1 meter lengths (for larger sizes)

type	colour	inside Ø (mm)		wall thickness	description	pack	(met)	price
		expanded	recovered					
EV 100 series - general purpose thin wall flexible tubing in cross-linked polyolefin								
Shrinkage ratio:		2:1		Fire resistance:		FMVSS 302		
Working temperature:		-30°C ~ +105°C		Shrinkage temperature:		>90°C		
Available colours:		■ black		Dielectric strength:		>20kV/mm		
12251016	black	■ 1.6	0.8	0.43	heat shrink tubing	box	15	97.19
12251024	black	■ 2.4	1.2	0.51	heat shrink tubing	box	15	101.83
12251032	black	■ 3.2	1.6	0.51	heat shrink tubing	box	15	112.27
12251048	black	■ 4.8	2.4	0.51	heat shrink tubing	box	12	105.54
12251064	black	■ 6.4	3.2	0.64	heat shrink tubing	box	12	122.26
12251095	black	■ 9.5	4.7	0.64	heat shrink tubing	box	10	132.32
12251127	black	■ 12.7	6.4	0.64	heat shrink tubing	box	8	128.21
12251190	black	■ 19.1	9.5	0.77	heat shrink tubing	box	5	129.40
12251254	black	■ 25.4	12.7	0.89	heat shrink tubing	box	3	114.82
ET 100 series - thin flexible tubing in cross-linked polyolefin								
High mechanical strength, chemical resistant, self extinguishing according to UL224								
Shrinkage ratio:		2:1		Dielectric strength:		>20kV/mm		
Available colours:		■ black, ■ R-red, □ BI-white, ■ BL-blue, ■ G/V-green/yellow		Shrinkage temperature:		>100°C		
Working temperature:		-55°C ~ +135°C						
12253024	black	■ 2.4	1.2	0.51	heat shrink tubing	box	15	134.00
12253032	black	■ 3.2	1.6	0.51	heat shrink tubing	box	15	141.00
12253048	black	■ 4.8	2.4	0.51	heat shrink tubing	box	12	145.00
12253064	black	■ 6.4	3.2	0.64	heat shrink tubing	box	12	170.00
12253095	black	■ 9.5	4.7	0.64	heat shrink tubing	box	10	176.00
12253127	black	■ 12.7	6.4	0.64	heat shrink tubing	box	8	178.00
12253190	black	■ 19.1	9.5	0.77	heat shrink tubing	box	5	190.00
12253254	black	■ 25.4	12.7	0.89	heat shrink tubing	box	3	167.00
12273381	black	■ 38.1	19.1	1.02	heat shrink tubing	meter	4	256.00
12273508	black	■ 50.8	25.4	1.14	heat shrink tubing	meter	3	257.00
12273762	black	■ 76.2	38.1	1.27	heat shrink tubing	meter	3	765.00
12273994	black	■ 101.6	50.8	1.4	heat shrink tubing	meter	3	1262.00
12253024R	red	■ 2.4	1.2	0.51	heat shrink tubing	box	15	140.00
12253032R	red	■ 3.2	1.6	0.51	heat shrink tubing	box	15	155.00
12253048R	red	■ 4.8	2.4	0.51	heat shrink tubing	box	12	160.00
12253064R	red	■ 6.4	3.2	0.64	heat shrink tubing	box	12	193.00
12253095R	red	■ 9.5	4.7	0.64	heat shrink tubing	box	10	199.00
12253127R	red	■ 12.7	6.4	0.64	heat shrink tubing	box	8	207.00
12253190R	red	■ 19.1	9.5	0.77	heat shrink tubing	box	5	225.00
12253254R	red	■ 25.4	12.7	0.89	heat shrink tubing	box	3	195.00
12273381R	red	■ 38.1	19.1	1.02	heat shrink tubing	meter	4	320.00
12273508R	red	■ 50.8	25.4	1.14	heat shrink tubing	meter	3	325.00
12253024BL	blue	■ 2.4	1.2	0.51	heat shrink tubing	box	15	138.00
12253032BL	blue	■ 3.2	1.6	0.51	heat shrink tubing	box	15	149.00
12253048BL	blue	■ 4.8	2.4	0.51	heat shrink tubing	box	12	155.00
12253064BL	blue	■ 6.4	3.2	0.64	heat shrink tubing	box	12	186.00
12253095BL	blue	■ 9.5	4.7	0.64	heat shrink tubing	box	10	196.00
12253127BL	blue	■ 12.7	6.4	0.64	heat shrink tubing	box	8	198.00
12253190BL	blue	■ 19.1	9.5	0.77	heat shrink tubing	box	5	215.00
12253254BL	blue	■ 25.4	12.7	0.89	heat shrink tubing	box	3	186.00
12273381BL	blue	■ 38.1	19.1	1.02	heat shrink tubing	meter	4	300.00
12273508BL	blue	■ 50.8	25.4	1.14	heat shrink tubing	meter	3	304.00
12253024BI	white	□ 2.4	1.2	0.51	heat shrink tubing	box	15	168.00
12253032BI	white	□ 3.2	1.6	0.51	heat shrink tubing	box	15	149.00
12253048BI	white	□ 4.8	2.4	0.51	heat shrink tubing	box	12	153.00
12253064BI	white	□ 6.4	3.2	0.64	heat shrink tubing	box	12	183.00
12253095BI	white	□ 9.5	4.7	0.64	heat shrink tubing	box	10	192.00
12253127BI	white	□ 12.7	6.4	0.64	heat shrink tubing	box	8	194.00
12253190BI	white	□ 19.1	9.5	0.77	heat shrink tubing	box	5	278.00
12253254BI	white	□ 25.4	12.7	0.89	heat shrink tubing	box	3	182.00
12273381BI	white	□ 38.1	19.1	1.02	heat shrink tubing	meter	4	291.00
12273508BI	white	□ 50.8	25.4	1.14	heat shrink tubing	meter	3	294.00

For green/yellow ■ colour replace last two letters with G/V