

9523 3120

ATyS - Motorised and automatic changeover switches

Three phase motorised changeover switches with positive break indication, enabling the on load transfer of two different three-phase supplies.

- Wide-band AC control voltage $\pm 20\%$
- Fail-safe mechanical interlock
- Padlockable in the "OFF" position
- Fully independent position auxiliary contacts one for each position (I / O / II)

type	AC-31 B 415V (A)	poles	description	dimensions (mm)		
				(H)	(W)	(D)

ATyS r - Motorised changeover switches supply: 230 VAC

Three-phase remotely operated motorised transfer switches, 3 or 4 poles, with positive break indication, enable the on load transfer of two three-phase power supplies via remote volt-free contacts, from an external automatic controller using pulse logic, or a switch.

3 pole switches

9523 3016	160A	3 pole	motorised changeover switch	135	287	244
9523 3025	250A	3 pole	motorised changeover switch	160	328	244
9523 3040	400A	3 pole	motorised changeover switch	170	328	244
9523 3063	630A	3 pole	motorised changeover switch	260	377	321
9523 3080	800A	3 pole	motorised changeover switch	370	504	440
9523 3100	1000A	3 pole	motorised changeover switch	370	504	440
9523 3120	1250A	3 pole	motorised changeover switch	370	504	440
9523 3160	1600A	3 pole	motorised changeover switch	380	596	440
9523 3200	2000A	3 pole	motorised changeover switch	380	596	569
9523 3250	2500A	3 pole	motorised changeover switch	380	596	569
9523 3320	3200A	3 pole	motorised changeover switch	380	596	569

4 pole switches

9523 4016	160A	4 pole	motorised changeover switch	135	317	244
9523 4025	250A	4 pole	motorised changeover switch	160	395	244
9523 4040	400A	4 pole	motorised changeover switch	170	395	244
9523 4063	630A	4 pole	motorised changeover switch	260	454	321
9523 4080	800A	4 pole	motorised changeover switch	321	584	440
9523 4100	1000A	4 pole	motorised changeover switch	321	584	440
9523 4120	1250A	4 pole	motorised changeover switch	330	584	440
9523 4160	1600A	4 pole	motorised changeover switch	288	716	440
9523 4200	2000A	4 pole	motorised changeover switch	380	716	569
9523 4250	2500A	4 pole	motorised changeover switch	380	716	569
9523 4320	3200A	4 pole	motorised changeover switch	380	716	569



9523 4016

ATyS g - Automatic changeover switches supply: 230 VAC

Automatic changeover switches for transformer/generator applications. An integrated controller provides all necessary functions, including monitoring the voltage and frequency of both sources, providing on-load changeover switching between two power supply sources.

- Integrated dual power supply (2 independent supplies within the switch)
- Integrated generator on-load and off-load test function

ATyS g automatic changeover switches


3 pole switches

9553 3016	160A	3 pole	automatic changeover switch	135	287	244
9553 3025	250A	3 pole	automatic changeover switch	160	328	244
9553 3040	400A	3 pole	automatic changeover switch	170	328	244
9553 3063	630A	3 pole	automatic changeover switch	260	377	321
9553 3080	800A	3 pole	automatic changeover switch	321	504	392
9553 3100	1000A	3 pole	automatic changeover switch	321	504	392
9553 3120	1250A	3 pole	automatic changeover switch	330	504	392
9553 3160	1600A	3 pole	automatic changeover switch	288	596	392

4 pole switches

9553 4016	160A	4 pole	automatic changeover switch	135	317	244
9553 4025	250A	4 pole	automatic changeover switch	160	395	244
9553 4040	400A	4 pole	automatic changeover switch	170	395	244
9553 4063	630A	4 pole	automatic changeover switch	260	454	321
9553 4080	800A	4 pole	automatic changeover switch	321	584	392
9553 4100	1000A	4 pole	automatic changeover switch	321	584	392
9553 4120	1250A	4 pole	automatic changeover switch	330	584	392
9553 4160	1600A	4 pole	automatic changeover switch	288	716	392

Larger sizes (up to 3200A) available on request.

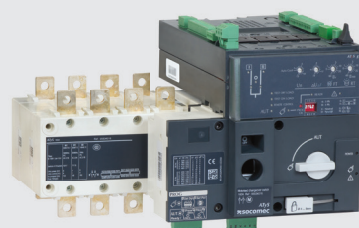

9553 4016