

VBWK4M


Bridging bars screw-in type for WK series terminals

type	wire size mm ²	no. ways		description	for terminal
VBWK2.5M	2.5 mm	80 way	screw-in	bridging bar for term.	WK2.5/U
VBWK4M	4 mm	70 way	screw-in	bridging bar for term.	WK4/U
VBWK6M	6 mm	40 way	screw-in	bridging bar for term.	WK6/U
VBWKN10M	10 mm	40 way	screw-in	bridging bar for term.	WKN10/U
VBWKN16M	16 mm	30 way	screw-in	bridging bar for term.	WKN16/U
VBWKN35M	35 mm	20 way	screw-in	bridging bar for term.	WKN35/U
VBWRT35-2	35 mm	2 way	screw-in	bridging bar for term.	WRT35
VBWRT35-3	35 mm	3 way	screw-in	bridging bar for term.	WRT35
VBWRT70-2	70 mm	2 way	screw-in	bridging bar for term.	WRT70
VBWRT70-3	70 mm	3 way	screw-in	bridging bar for term.	WRT70
VBWRT120-2	120 mm	2 way	screw-in	bridging bar for term.	WRT120
VBWRT120-3	120 mm	3 way	screw-in	bridging bar for term.	WRT120
VBWRT185-2	185 mm	2 way	screw-in	bridging bar for term.	WRT185
VBWRT185-3	185 mm	3 way	screw-in	bridging bar for term.	WRT185
VBWRT300-2	300 mm	2 way	screw-in	bridging bar for term.	WRT300
VBWRT300-3	300 mm	3 way	screw-in	bridging bar for term.	WRT300

WRT terminal block with screw bolt connection (accommodates ring lugs)

Standard through terminal with threaded stud termination, incorporating a hinged section nut to accommodate a ring lug, provides a secure, safe connection preventing cable from disconnection in the event of loosened screw.

- Universal screw bolt - ring lug connection system (M4)
- Hinged terminal screw for easy access of ring lugs
- Universal marking system

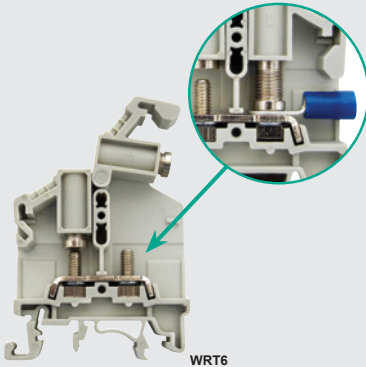

WRT6


type	wire size mm ²	amperage IEC 947-7-1	term. width	max. voltage	description
------	------------------------------	-------------------------	----------------	-----------------	-------------

WRT terminal with stud connection to accept ring lugs

WRT6	0.5 - 6	41A	11 mm	800V	bolt connection terminal block
APRT6	end plate		end plate for above terminal		for term. WRT6

WKN spring supported screw connection terminal block

Special application terminal with spring supported screw connection for use with hook blade terminals the spring provides a secure, safe connection, simultaneously preventing hook blade lug from exiting the terminal even in the event of a loosened connection.

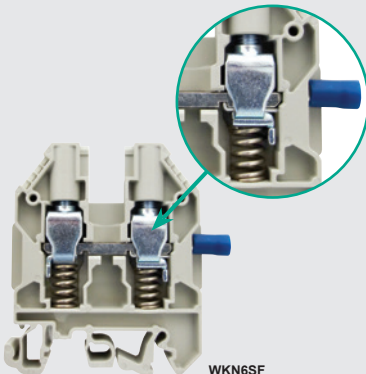

WKN6SF

WKN6SF	0.5 - 6	41A	8 mm	800 V	spring assisted terminal block
WKN10SF	2.5 - 10	57A	10 mm	800 V	spring assisted terminal block
APN6SF	end plate		end plate for above terminal		for term. WKN6SF
APN10SF	end plate		end plate for above terminal		for term. WKN10SF

Busbar termination (earth/neutral)

Busbar	(1 meter length)				
GI06006.1	6 x 6 mm	120A	1 met.	-	busbar for WAK terminals


Busbar support

19.230.2510.0	support		KSO11/1ZKR		busbar support for 6 x 6 mm bars
----------------------	---------	--	------------	--	----------------------------------

Terminals - slide-on - earth or neutral

- Steel - zinc plated (galvanised)

30.494.0010.0	0.5 - 4	41A	AK4/1		clamp terminal for 6 x 6 mm busbar
30.494.1010.0	1 - 16	76A	AK16/1		clamp terminal for 6 x 6 mm busbar
30.494.1110.0	2.5 - 25	41A	AK25/3		clamp terminal for 6 x 6 mm busbar
30.494.2510.0	2.5 - 35	125A	AK35/3		clamp terminal for 6 x 6 mm busbar

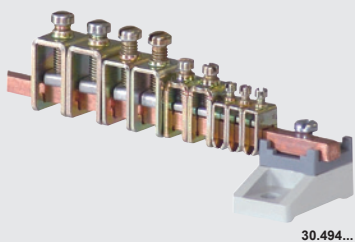

30.494...